

621.357.7

• • , • • , • • ,
 • • , • • , • • « »

Experimental data on change of copper thickness on the cathode and copper lay on the anode along vertical and horizontal centerline of electrode surface are resulted. The expediency during electrochemical processing copper contained waste to load into an electrolytic cell sheets of sub-standard foiled dielectric bending them on a surface of the cylinder by the convex side to the cathodem is shown.

• [1] -

• -

• ,

-

•

• ,

• ,

• -

• -

[2].

3: - 450, - 30.

35 , 50 50 .

1 . -

.

. 1 2

,



,

(max)

(H_{min}).

max

H_{min}

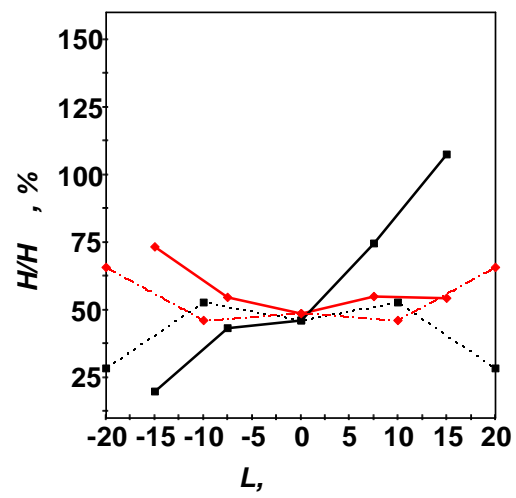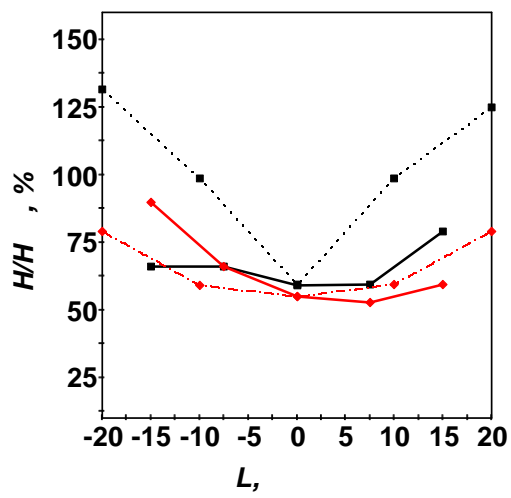

.1.

(,)

(,)

(,)

(,)

: -

; -

.1

(. .)

(. .),

(. .).

